


High Compliance Moving Coil Cartridge


Unlike most conventional moving coil cartridges that are so low in output and cannot be used without boosting, Sansui's SR-4040 cartridge features a built-in boosting transformer so that it can be connected directly to any amplifier. This cartridge incorporates a powerful magnetic circuit and a newly designed moving coil system for the finest in sound reproduction. Complete with diamond stylus and cartridge holder.



Interchangeable Capstans The SR-4040 is provided with two capstans, one for operating the turntable at 50 Hz, the other for 60 Hz. Both can be changed in minutes and allow the unit to be used anywhere in the world.

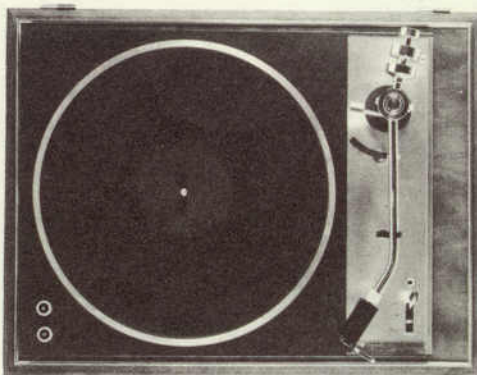

Styling From its non-glare cast zinc platter and beautifully curved tonearm, to its rich looking aluminum extruded motorboard and oil-finished walnut base, the SR-4040's handsome appearance keeps pace with its high standards of performance. A molded acrylic dust cover with special removable hinges completes the SR-4040's simple but elegant design.

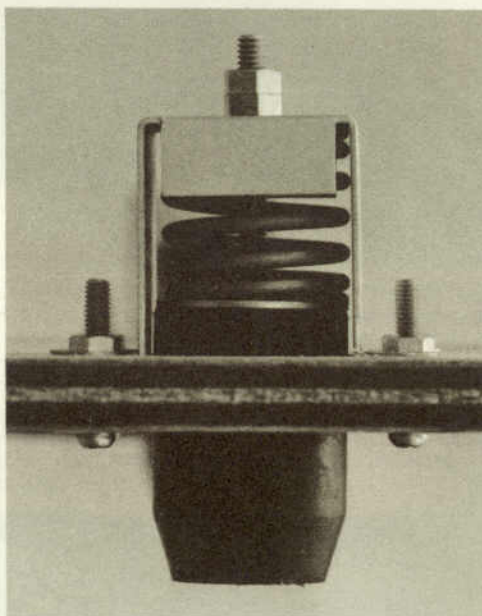

Anti-Howling Insulators The entire unit floats on four specially designed shock-absorbing rubber feet which isolate it from external jarring and vibrations, two common causes of howling. In addition, its cast aluminum motorboard has been rib-reinforced and made sufficiently thick to further eliminate resonance and howling.

SPECIFICATIONS

TURNTABLE: Two-piece platter consisting of a 12"-diameter outer platter of cast zinc base alloy (weight, 5½ lbs) and an 8"-diameter inner platter of cast aluminum alloy (weight, 1½ lbs)

DRIVE MOTOR: 4-pole synchronous capacitor-starting motor

POWER REQUIREMENT: 100 to 117 or 220 to 240 volts, 50 or 60 Hz, 15VA

SPEEDS: 33½ and 45 r.p.m.

SIGNAL-TO-NOISE RATIO: Better than 46 dB

WOW AND FLUTTER: Less than 0.08%

SPEED-CHANGE: Speeds are changed by pushing a speed selector which shifts the belt.

TONEARM: Static-balanced type tubular arm

TRACKING ERROR: Less than ±1°

STYLUS PRESSURE: 0 to 2.5 grams (direct-reading gram-scale with ½-gram markings)

CARTRIDGE: Moving-coil cartridge with built-in boosting transformer

FREQUENCY RESPONSE: 15 to 20,000 Hz.

OUTPUT BALANCE: Less than 1.0 dB

CHANNEL SEPARATION: Better than 30dB at 1,000Hz

OUTPUT VOLTAGE: 4 mV at 1,000 Hz, 50 mV

STANDARD LOAD RESISTANCE: 50 kΩ

STYLUS PRESSURE: 1.5 to 2 grams

STYLUS COMPLIANCE: 18×10⁻⁶ cm/dyne

STYLUS: 0.5 mils diamond, spherical

ACCESSORY EQUIPMENT: Oil-damped arm lifter which is controlled by the power switch lever.

Stylus pressure direct-reading counter-weight.

Subweight for compensating the weight of cartridge used. Anti Howling Insulators

Interchangeable plug-in shell

WOOD BASE: Walnut open-pore finish w / molded acrylic dust cover

DIMENSIONS: 20¼" wide × 15½" deep × 6¼" high

WEIGHT: 24.4 lbs

Sansui®

SANSUI ELECTRIC COMPANY LIMITED / 14-1, 2-CHOME, IZUMI, SUGINAMI-KU, TOKYO, JAPAN / TELEX TOKYO: 232-2076

Printed in Japan(07003K)