

Technical Manual

N38II

Northridge™ Series

JBL

ACOUSTIC & ELECTRICAL SPECIFICATIONS:

- Nominal Impedance 8 ohms
- Max Amp Power 175 watts*
- Frequency Response 45Hz – 20kHz
- Sensitivity 90dB (1 watt @ 1 meter)
- Crossover Frequencies 1000Hz, 5000Hz

SYSTEM COMPONENTS:

- Enclosure N38II (not for sale)
- Grille 337794-001
- Low-Frequency Transducer 8" (203mm) Polyplas™, shielded 335469-002
- DC Resistance 5.2 ohms $\pm 10\%$
- Mid-Frequency Transducer 4" (102mm) Polyplas™, shielded 335588-002
- DC Resistance 4.4 ohms $\pm 10\%$
- High-Frequency Transducer 3/4" (19mm) titanium-laminate dome, shielded 338035-001
- DC Resistance 3.0 ohms $\pm 10\%$
- Crossover Network 335597-001

AURAL SWEEP TEST SPECIFICATIONS:

- System Aural Sweep Test 6.0V Input 40Hz to 20kHz
- L.F. Aural Sweep Test 6.0V Input 40Hz to 2kHz
- M.F. Aural Sweep Test 4.0V Input 500Hz to 6kHz
- H.F. Aural Sweep Test 2.83V Input 4kHz to 20kHz

PHYSICAL SPECIFICATIONS:


- Enclosure Dimensions 34" x 10-1/2" x 11-7/8" (H x W x D) 864mm x 267mm x 302mm
- Weight 35 lb/15.9kg (each)

WARRANTY:


- Refer to Warranty Statement packed with each product.

* The maximum recommended amplifier power rating will ensure proper system headroom to allow for occasional peaks. We do not recommend sustained operation at these maximum power levels.


PACKAGING

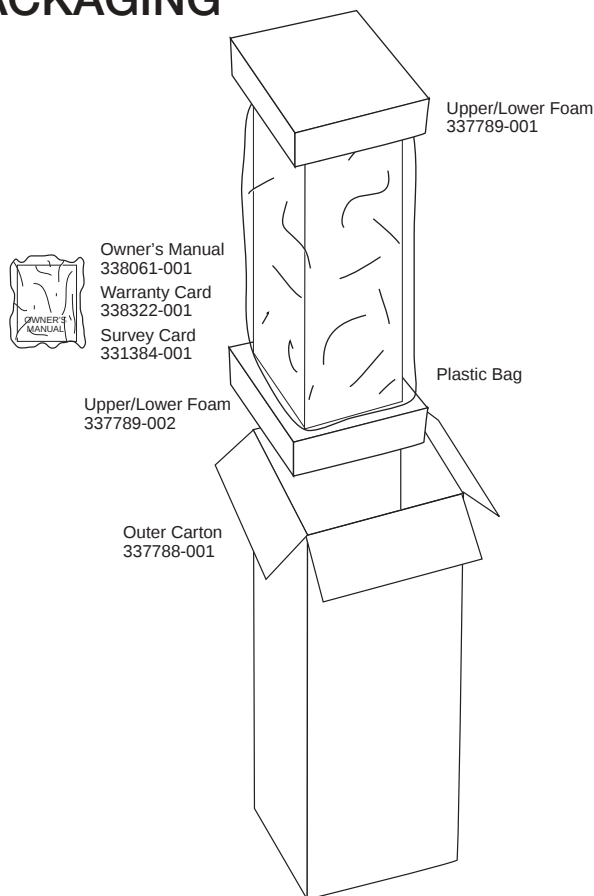

WIRING DIAGRAM

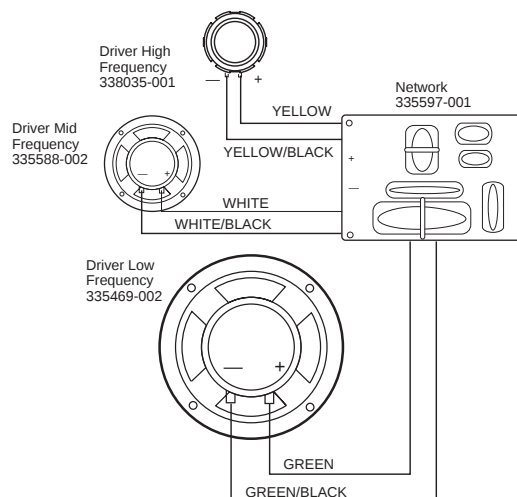

N38II SCHEMATIC

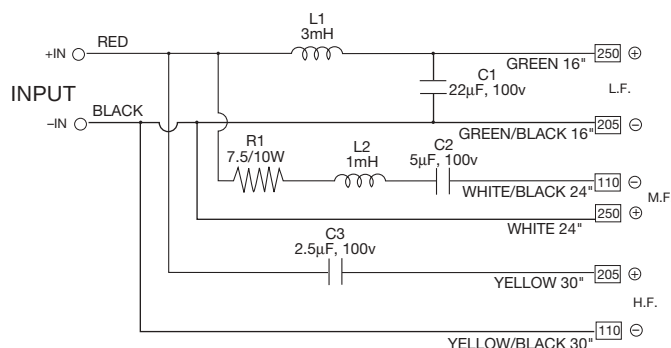


N38II

Northridge™ Series

JBL

EXPLODED VIEW

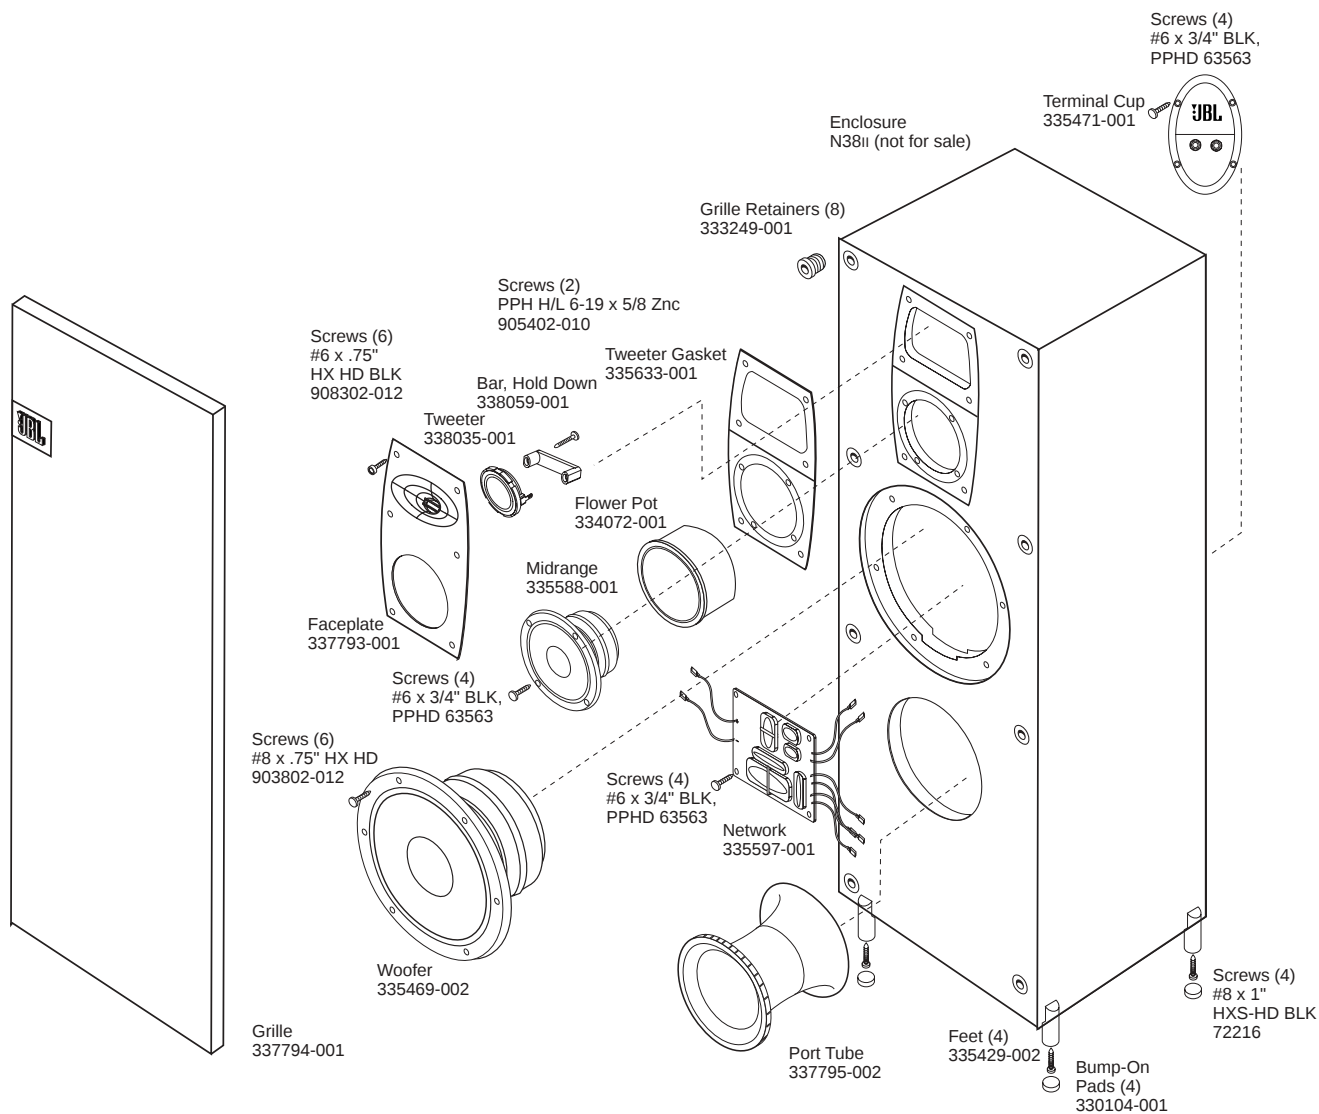

N38II Northridge™ Series